



**Bexar County**

**Flood Control CIP Program**

**Project: SC15**


**Rosillo Creek NWWC**

**Location / Limits: Between FM78 and Ackerman Road**



**SCOPE :**

This project includes channel improvements and the construction of multiple bridge structures and large culvert crossings between FM 78 and Ackerman Road. Bridges will be built along Old Seguin, Kirby, Binz-Engleman, and Ackerman roads; culvert crossings will be built along Starfire, Redding, and Kirby roads. Channel improvements will extend from FM 78 and Ackerman Road. Approximately 160 properties will be removed from the floodplain due to planned improvements and floodplain remapping.

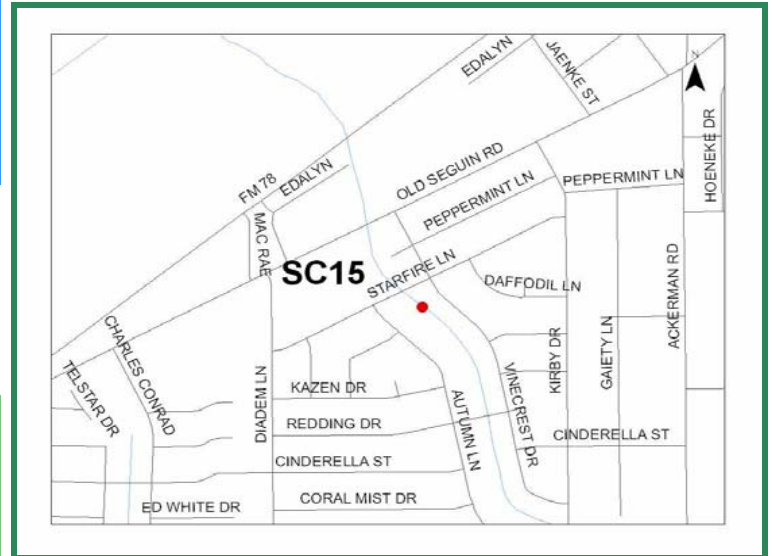

<b>Precinct:</b>	4	<b>OCL/ICL:</b>	ICL	CD 2
<b>Watershed:</b>	Salado Creek			
<b>Creek Name:</b>	West Tributary of Rosillo Creek			
<b>Project Type:</b>	Natural Waterway Conveyance			

<b>Consultant:</b>	PATE Engineers		
<b>Consultant Awarded:</b>	11/25/2008		
<b>Contractor:</b>	TBD		
<b>Contractor Awarded:</b>			
<b>Construction Start:</b>	Jun 2012		
<b>Construction End:</b>	May 2014		

<b>Estimated Construction Cost:</b>	\$8,000,000
-------------------------------------	-------------

<b>Project funded in:</b>	2007
<b>PROJECT STATUS</b>	<i>Detailed Design</i>